



INSTALLATION INSTRUCTIONS


Accessory
19" ALUMINUM WHEEL
 P/N 08W19-T3L-101
 P/N 08W19-T2F-100A

Application
2016 ACCORD
2 AND 4-DOOR

Publications No.
VERSION 1
 Issue Date
AUG 2015

PARTS LIST


Aluminum wheel
 (The illustration may differ from the actual wheel.)




Wheel center cap
 (The illustration may differ from the actual center cap.)




Valve




Wheel cleaning Information
 (Contained in the kit of 08W19-T2F-100A only. Give this information to your customer.)




TPMS Information
 (For models not equipped with standard 19" wheels. Give this information to your customer.)




Tire pressure information label A
 (Contained in the kit of 08W19-T3L-101 only. Use for 13M~15M Accord. May not be used.)




Tire pressure information label B
 (Use for 16M Accord. May not be used.)



Supplemental information A
 (Contained in the kit of 08W19-T3L-101 only. Use for 13M~15M Accord. May not be used.)



Supplemental information B
 (Use for 16M Accord. May not be used.)



TOOLS AND SUPPLIES REQUIRED

- Isopropyl alcohol
- Shop towel
- HDS/MVCI

SPECIFICATIONS

13M ~ 15M not equipped with standard 19" wheels:

Rim size	19 x 8J (inset 55)	
Tire size	235/40ZR19 96Y	
Bolt hole PCD	114.3 (5 holes)	
Tire pressure	Front	250 kPa (2.5 kgf/cm ² , 36 psi)
	Rear	250 kPa (2.5 kgf/cm ² , 36 psi)

16M not equipped with standard 19" wheels:

Rim size	19 x 8J (inset 55)	
Tire size	235/40R19 96V	
Bolt hole PCD	114.3 (5 holes)	
Tire pressure	Front	230 kPa (2.3 kgf/cm ² , 33 psi)
	Rear	220 kPa (2.2 kgf/cm ² , 32 psi)

Models equipped with standard 19" wheels:

Refer to the Owner's Manual.

INSTALLATION

Customer Information: The information in this installation instruction is intended for use only by skilled technicians who have the proper tools, equipment, and training to correctly and safely add equipment to your vehicle. These procedures should not be attempted by "do-it-yourselfers."

NOTE:

- The illustrations of the aluminum wheels are shown for reference purposes only.
- Install the correct size tire.
- Use a tire changer to install and remove the tires as described in the Operation Manual furnished with the tire changer. Do not use a tire lever to install and remove the tires as it may cause damage to the tire and aluminum wheel.
- The wheel nut torque is 108 N·m (11.0 kgf·m, 80 lbf·ft).
- This kit should be installed only if the ambient air temperature is 60°F (15°C) or above.
- To allow the adhesive to cure, do not wash the vehicle for 24 hours. Please advise the customer.

Models equipped with standard 19" wheels:

Discard the TPMS information, tire pressure information label and supplemental information in this kit.


- Be sure to give the wheel cleaning information (if included) to your customer.

Do steps 1 through 17 for models not equipped with standard 19" wheels.

1. Open the driver's door. Using isopropyl alcohol on a shop towel, thoroughly clean the area where the tire pressure information label will attach. Remove the adhesive backing from the accessory tire pressure information label, and attach it over the standard tire pressure information label as shown.

ACCESSORY TIRE PRESSURE INFORMATION LABEL A
(Use for 13M-15M Accord.)


ACCESSORY TIRE PRESSURE INFORMATION LABEL B
(Use for 16M Accord.)

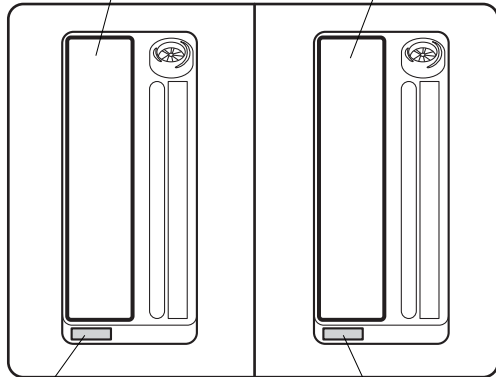

3L19A

3L19B

ADHESIVE BACKING
(Remove.)

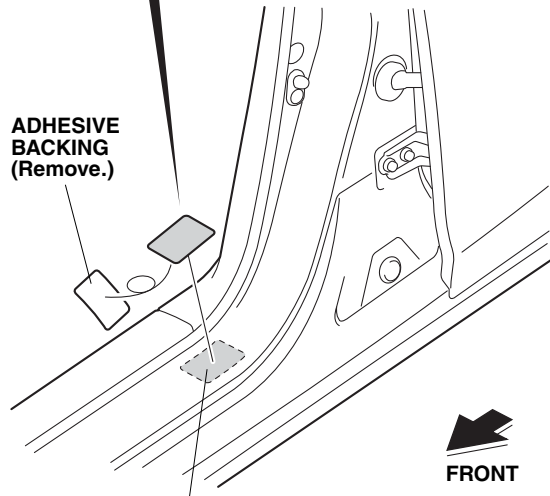

FRONT


STANDARD TIRE PRESSURE INFORMATION LABEL
(Clean with isopropyl alcohol.)

QE40902AB

2. Attach the "Supplemental Information" page included in this kit into the Owner's Manual or Owner's Guide. For the method of attaching the page, refer to "Important Information to Dealer" attached to the "Supplemental Information" page.


Inch-up Tire Pressure Programming

3. Connect the HDS/MVCI to the data link connector, then turn the engine switch to on.

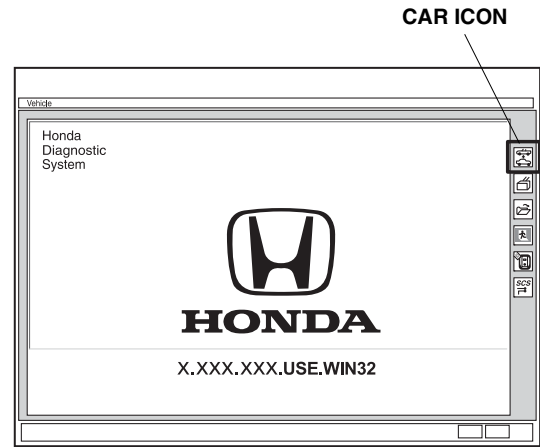

QB82401AB

4. Start the Honda Diagnostic System, then click the car icon.
5. Input the VIN and other requirements in accordance with the HDS, then click the check button.

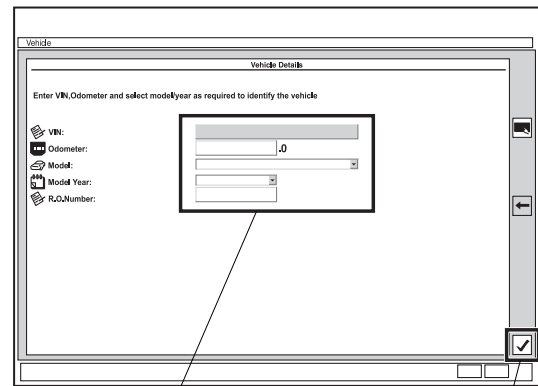


Input the VIN and other required information.


CHECK BUTTON

QB82411AY


- Select the "Honda Systems" and click the check button.

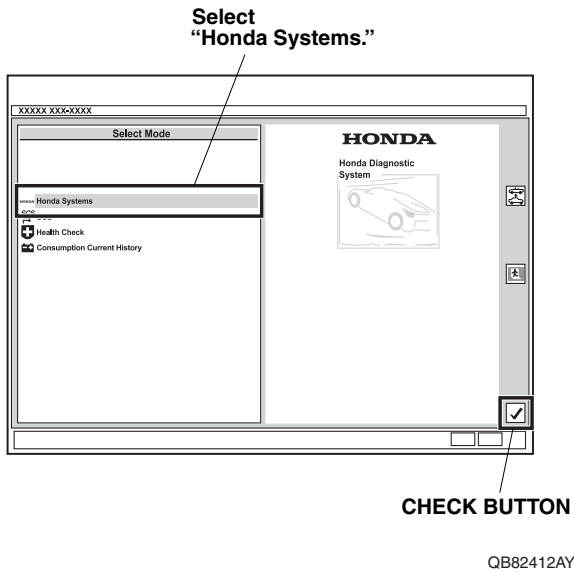


- Select the "TPMS (VSA) threshold" and click the check button.

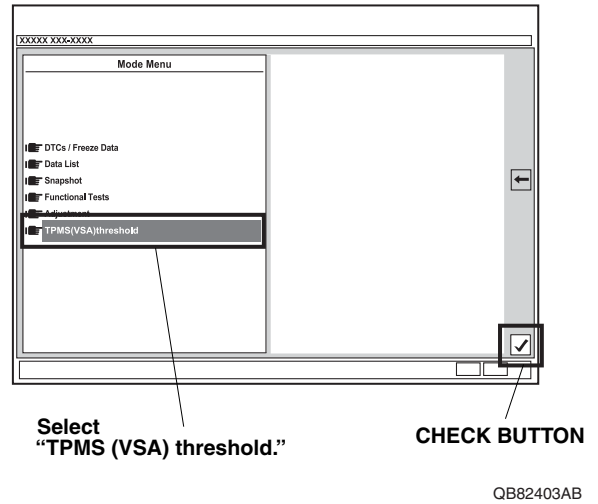


- Select the "ABS TCS VSA" and click the check button.

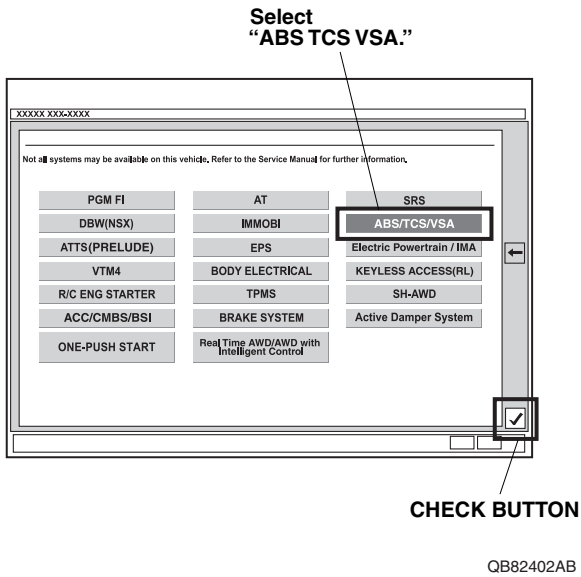


- Select the "YES."

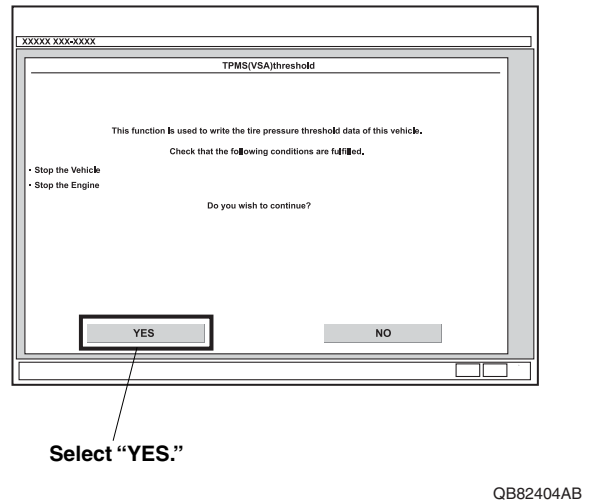


- Select the "19 Inch" and click the check button.
NOTE: If "18 Inch" is only displayed on the new wheel size settings, go to step 15.

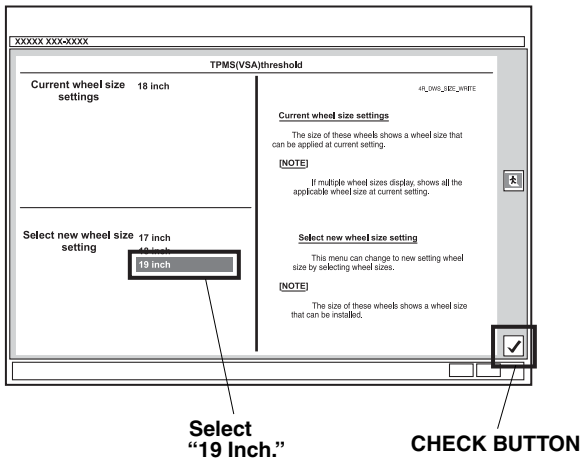


- Select the "YES."

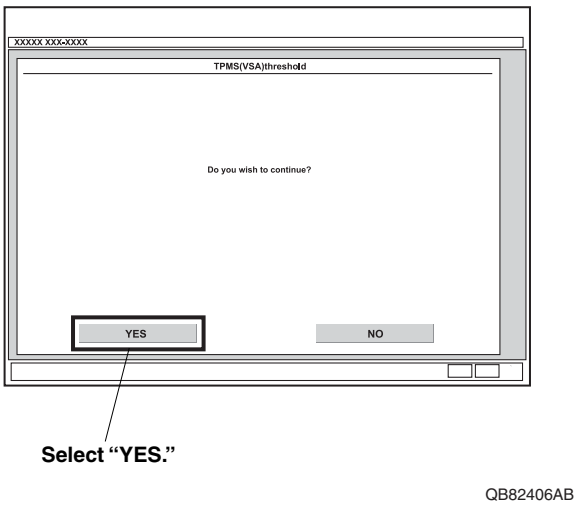


- Click the check button.

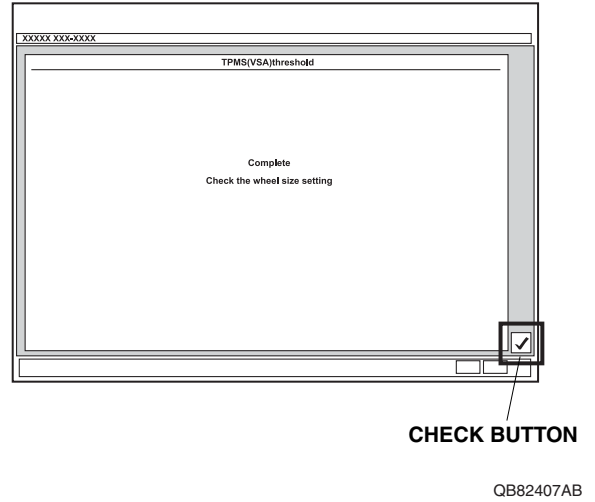

- Turn the engine switch to off.

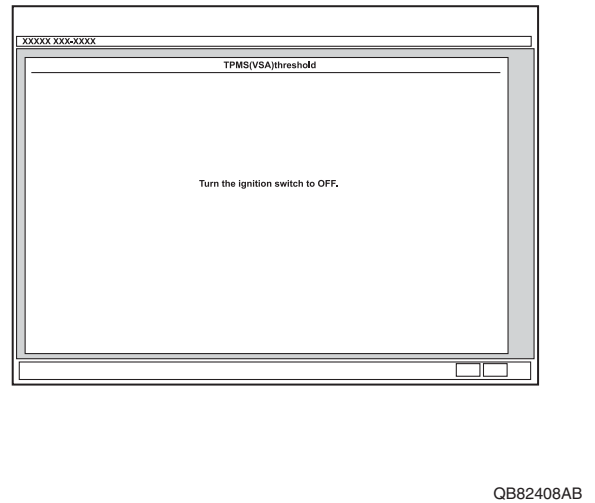

14. The following message will display: “Turn the ignition switch to ON.” Then turn the engine switch to on.

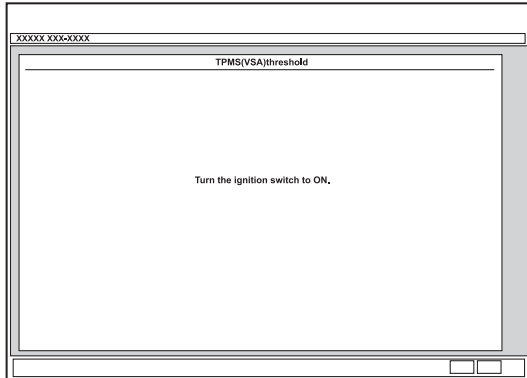

QB82409AB

15. Disconnect the HDS.
16. Perform the TPMS calibration according to the instructions in the Service Manual (TPMS Calibration).
17. After finishing the work, write the tire size, tire pressure, HDS version, dealer name, technician's signature and date in “Service History Page for Honda Accessory Alloy Wheels” page included in this kit.
 - Be sure to explain the contents of the “Supplemental Information” when delivering the vehicle to your customer.
 - Be sure to give the wheel cleaning information (if included) and TPMS information to your customer.

Deflation Warning System Threshold Rewriting

- If the 18 inch wheels are to be installed back on the vehicle, you must change the threshold value with the HDS; refer to steps 3 to 16.
- For step 10, select the 18 inch.

NOTE: If "18 Inch" is displayed on the current wheel size settings, go to step 15.

- After finishing the work, write tire size, tire pressure, HDS version, dealer name, technician's signature and date in "Service History Page for Honda Accessory Alloy Wheels" page attached on the vehicle's Owner's Manual or Owner's Guide.